


1/14

Control Channel (CCH)

FIG 1

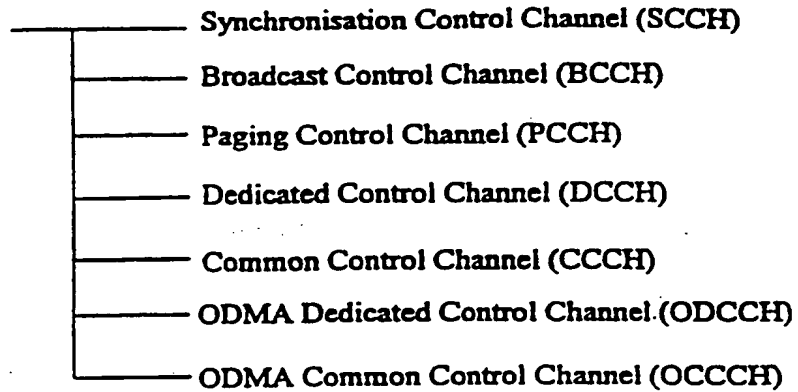

Traffic Channel (TCH)

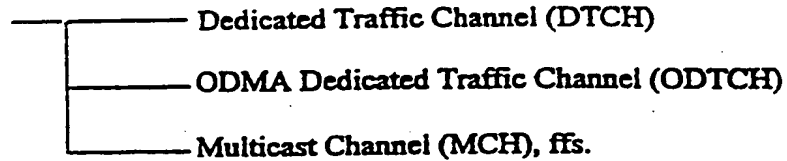


FIG 3



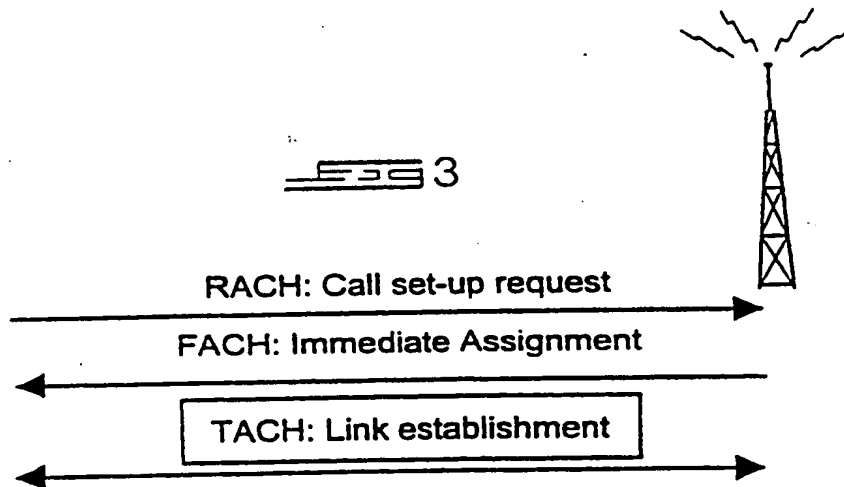


FIG 5

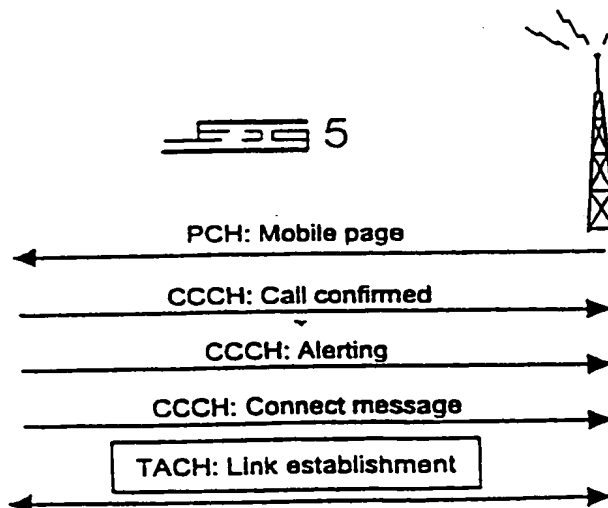

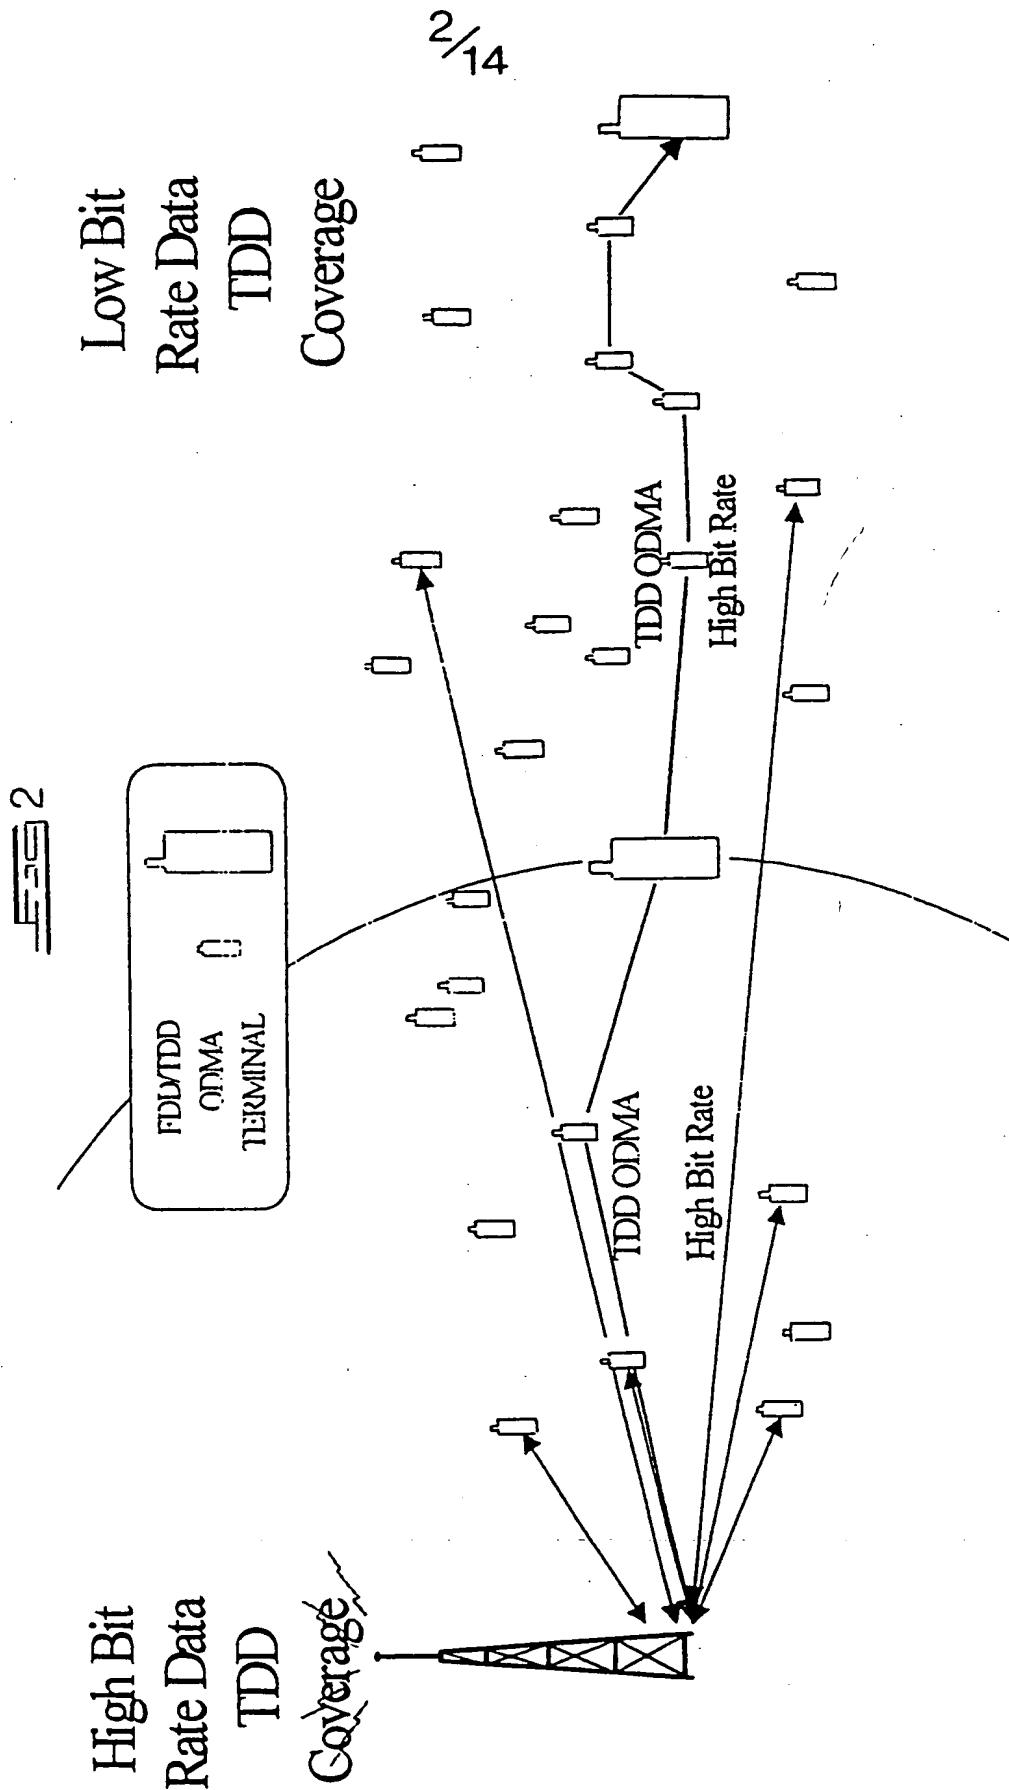

3/14

Fig 4

ID003

ID002

ID001

MS_AMS_BMS_C

ORACH: Call setup request to
neigh. with best gradient to ID000

ORACH: Reverse Relaylink
Assignment

ORACH: Call s etup request to
neigh. with best gradient to ID000

ORACH: Reverse Relaylink
Assignment

ORA CH: Call setup request to
neigh. with best gradient to ID003


ORACH: Forward Relaylink
Assignment

ORACH: Call setup request to
neigh. with best gradient to ID003


ORACH: Forward Relaylink
Assignment

4/14

FIG 4 4 Continued

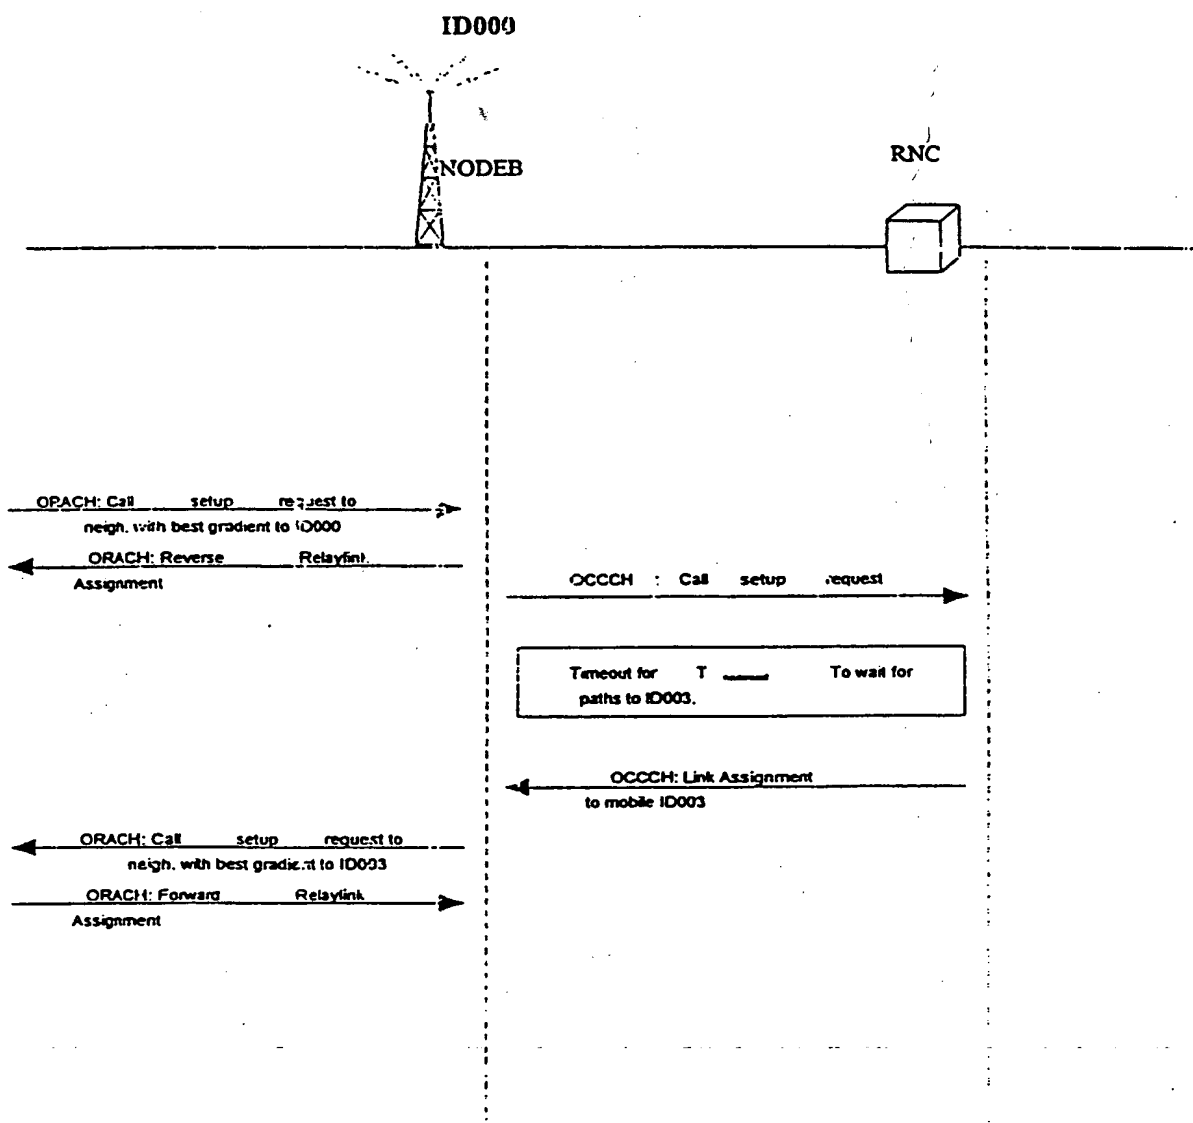

5/14

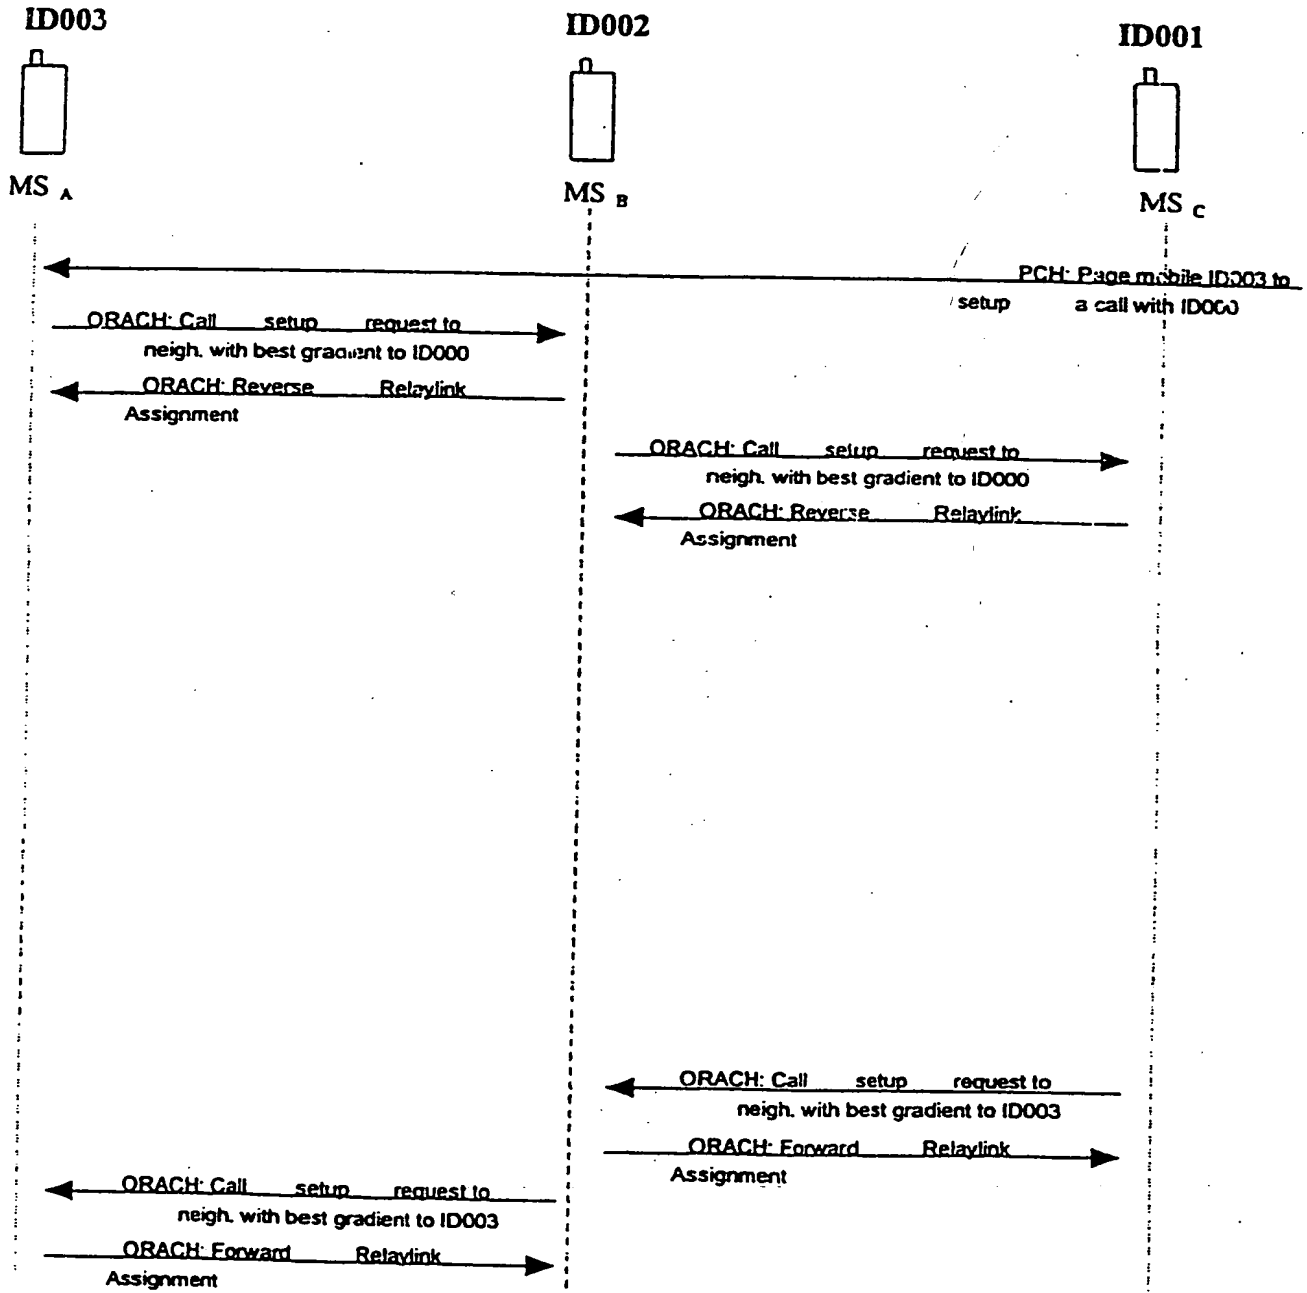FIG 6

6/14

Fig 6 Continued



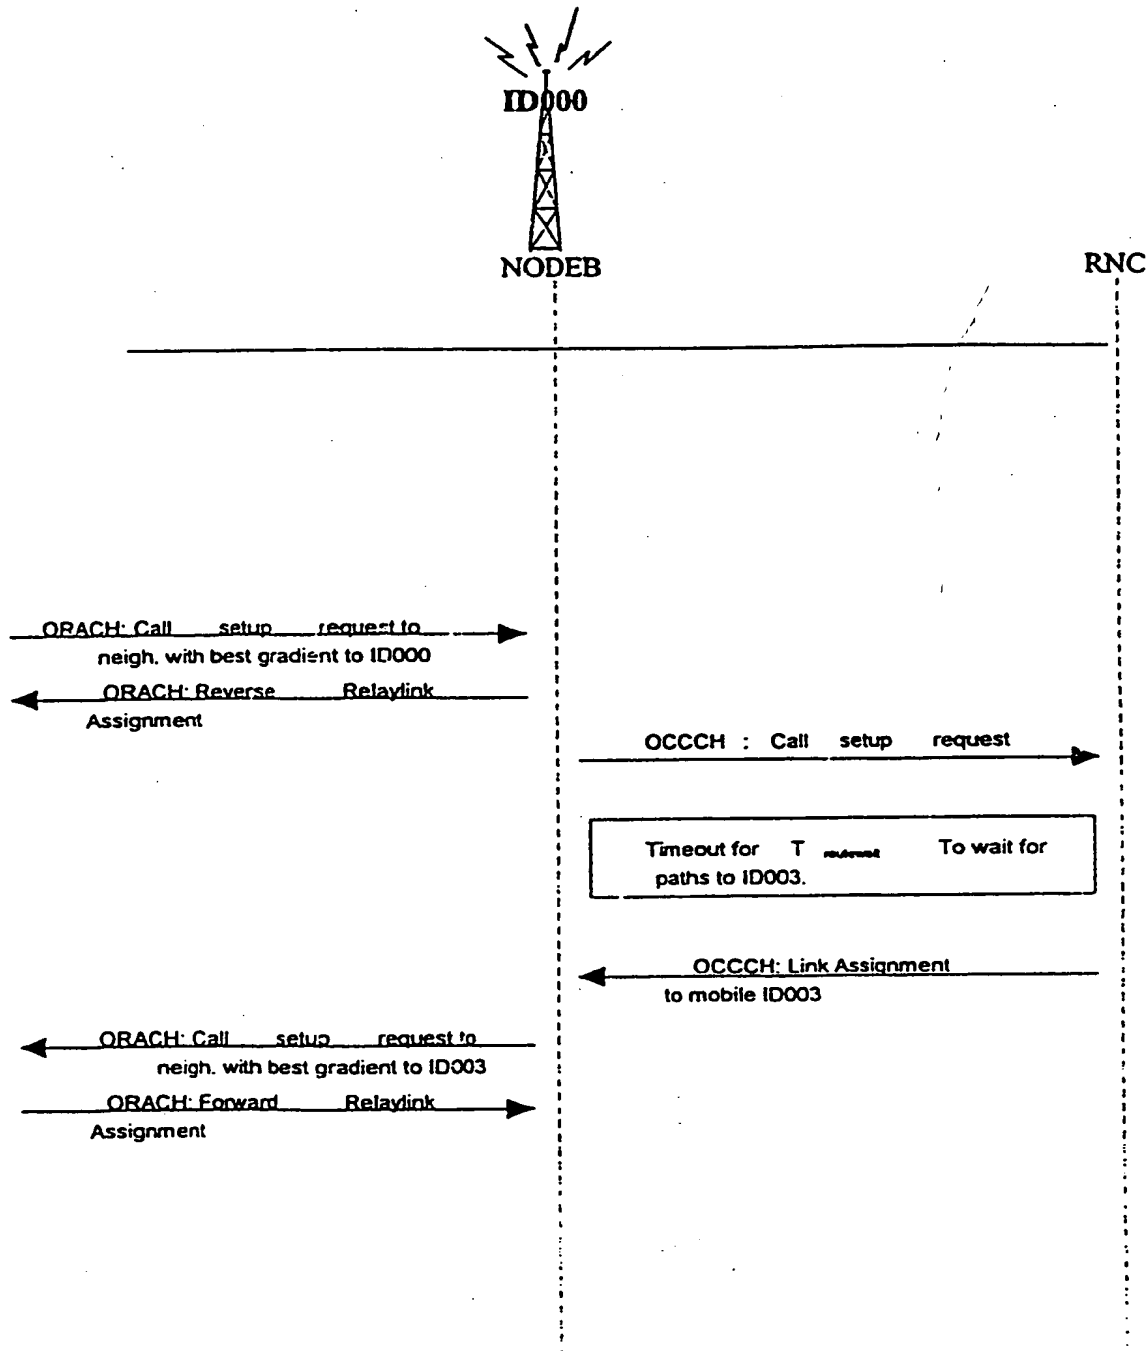



Fig 7

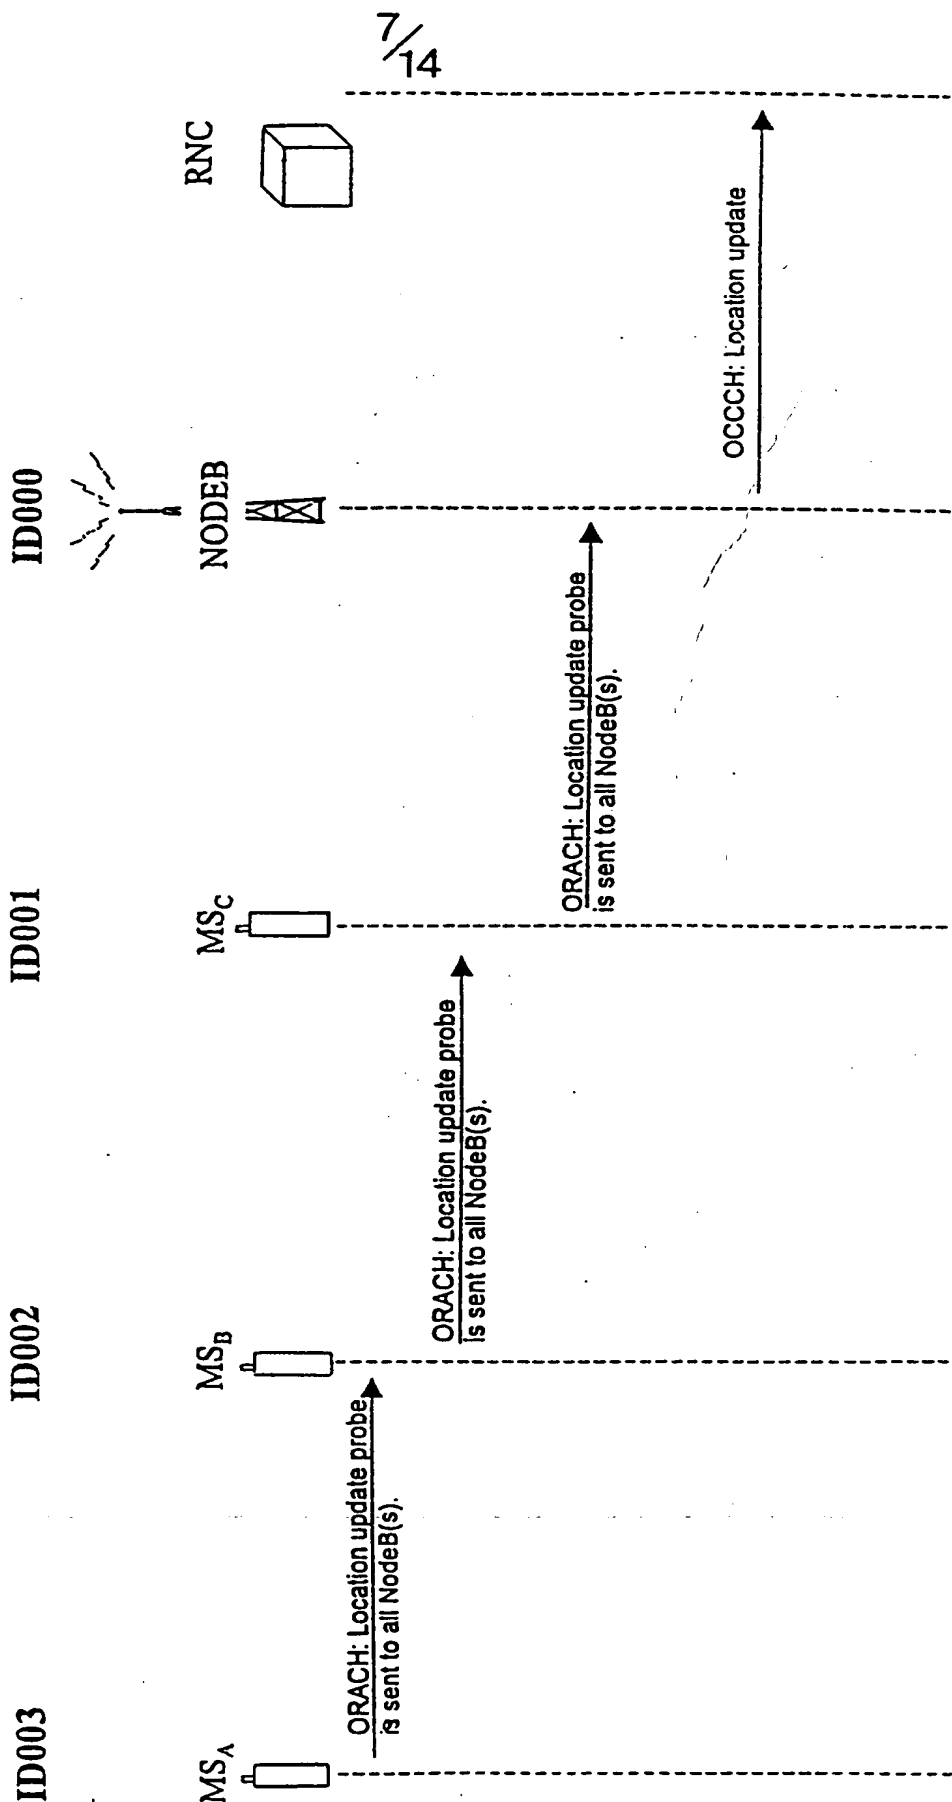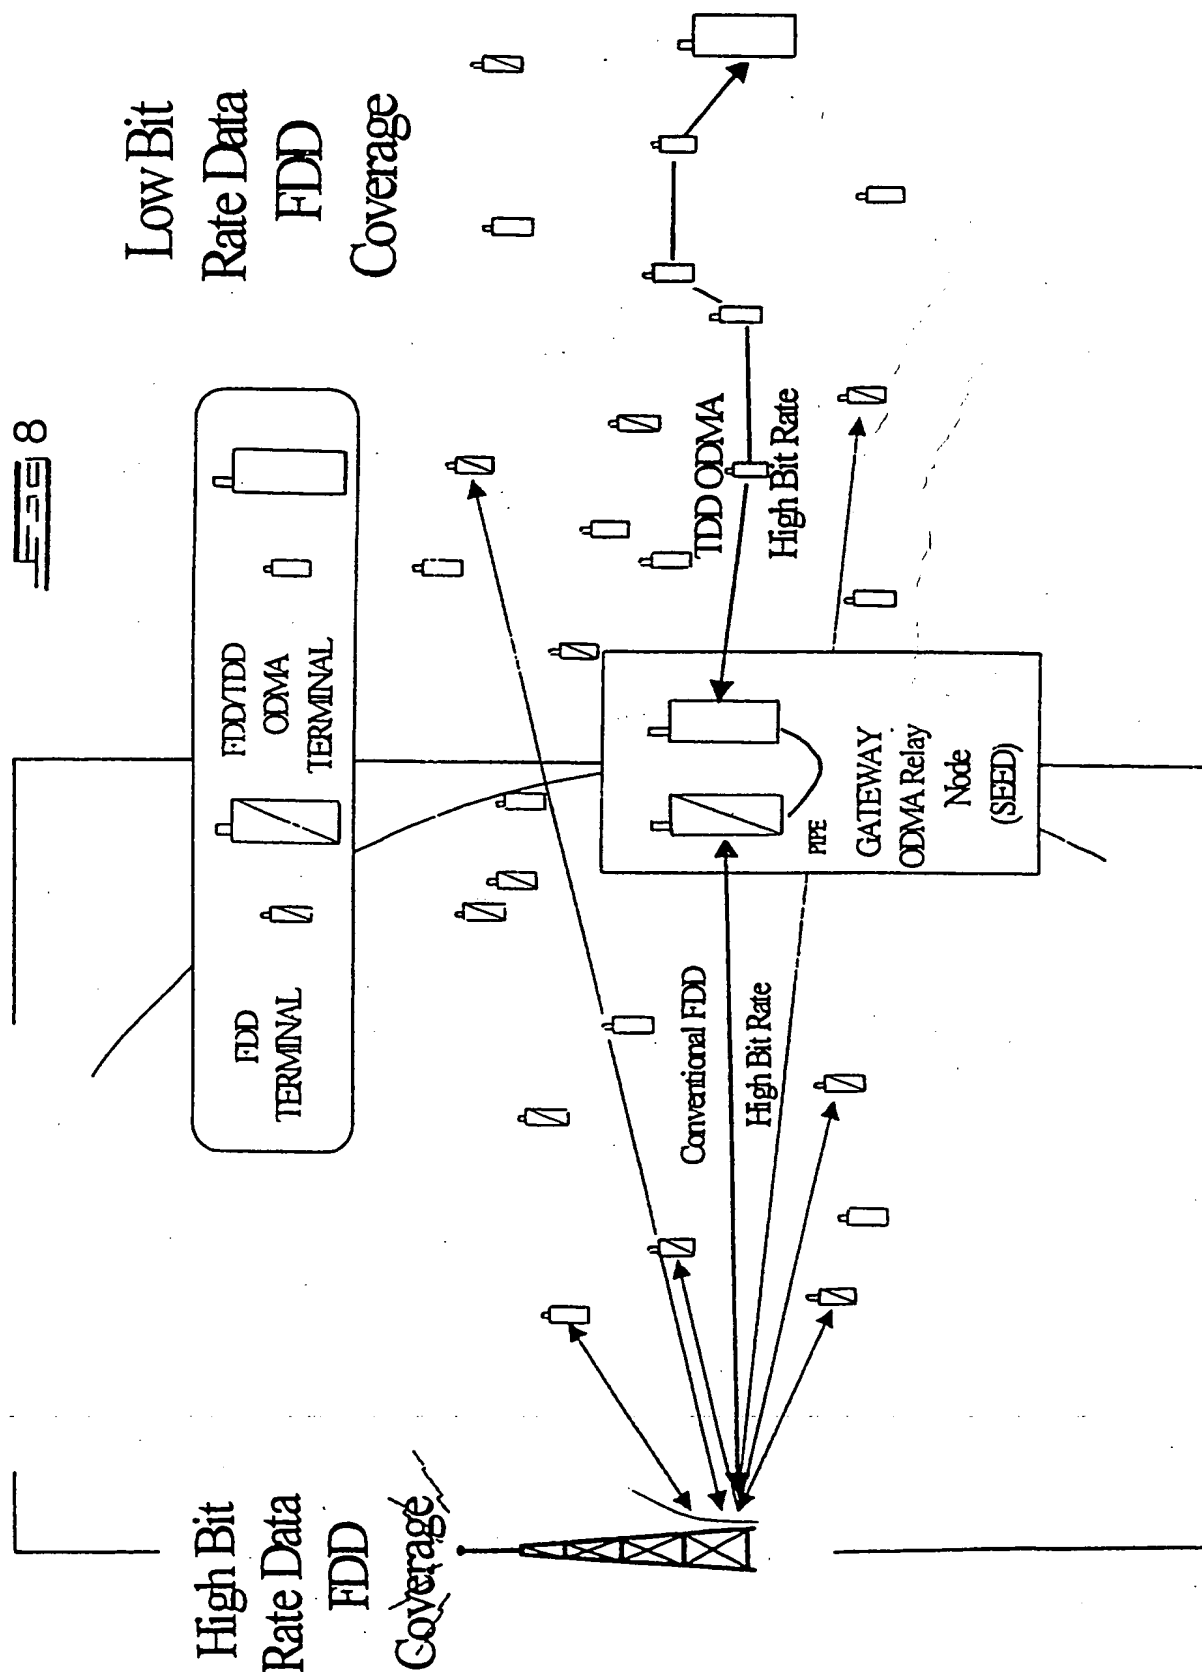

8
五


$$\frac{8}{14}$$


9/14

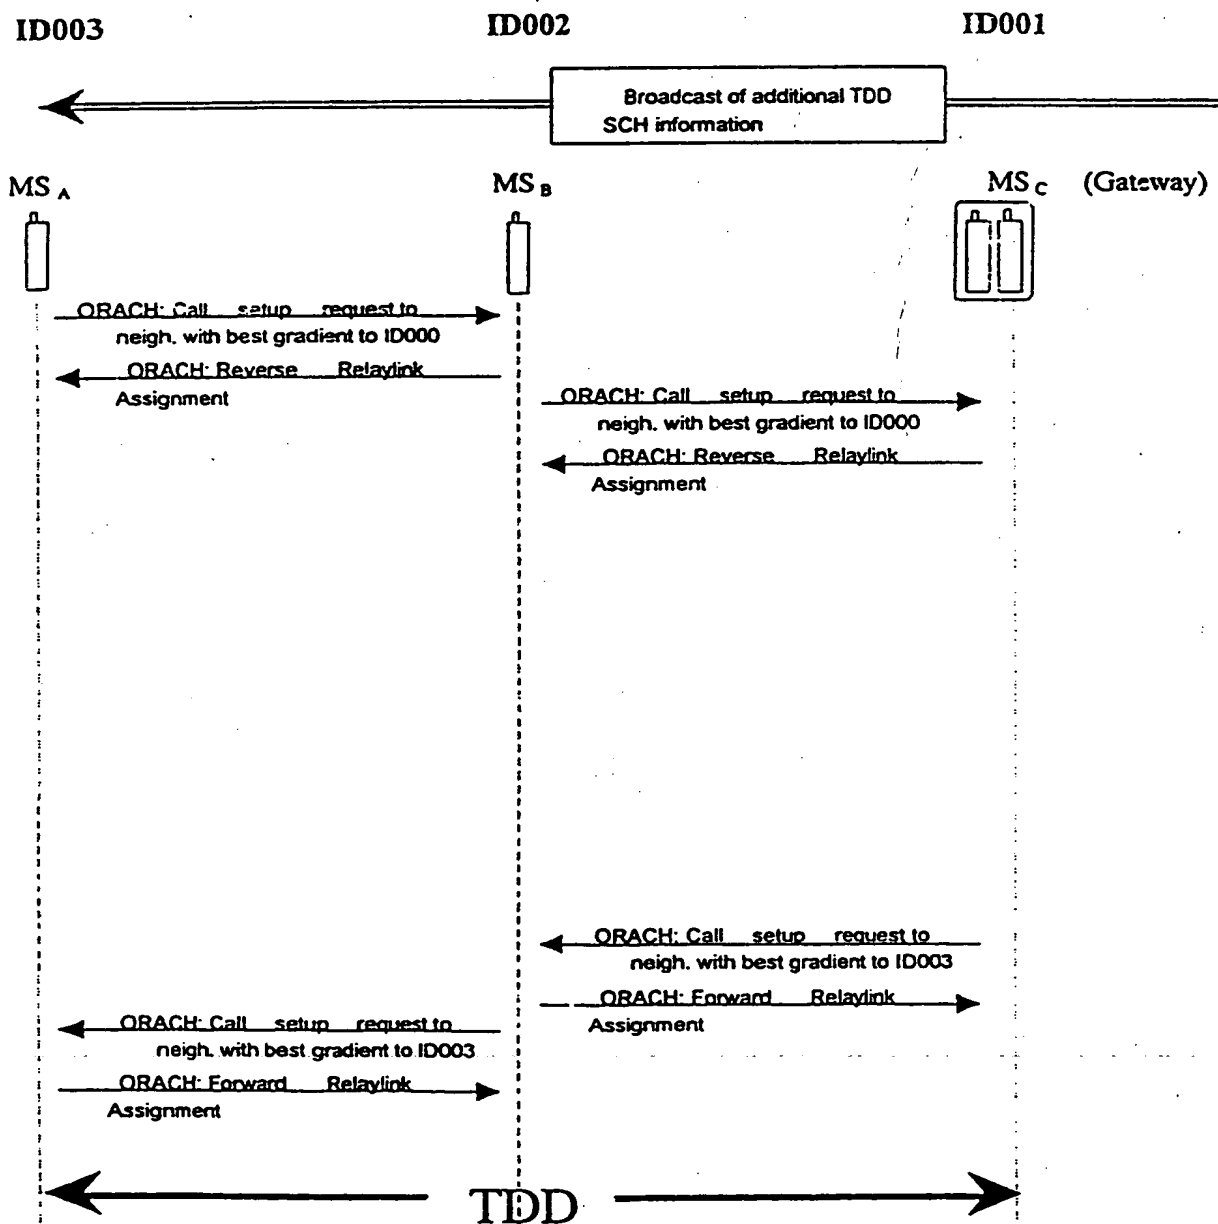Fig 9


10/14

FIG 9 Continued

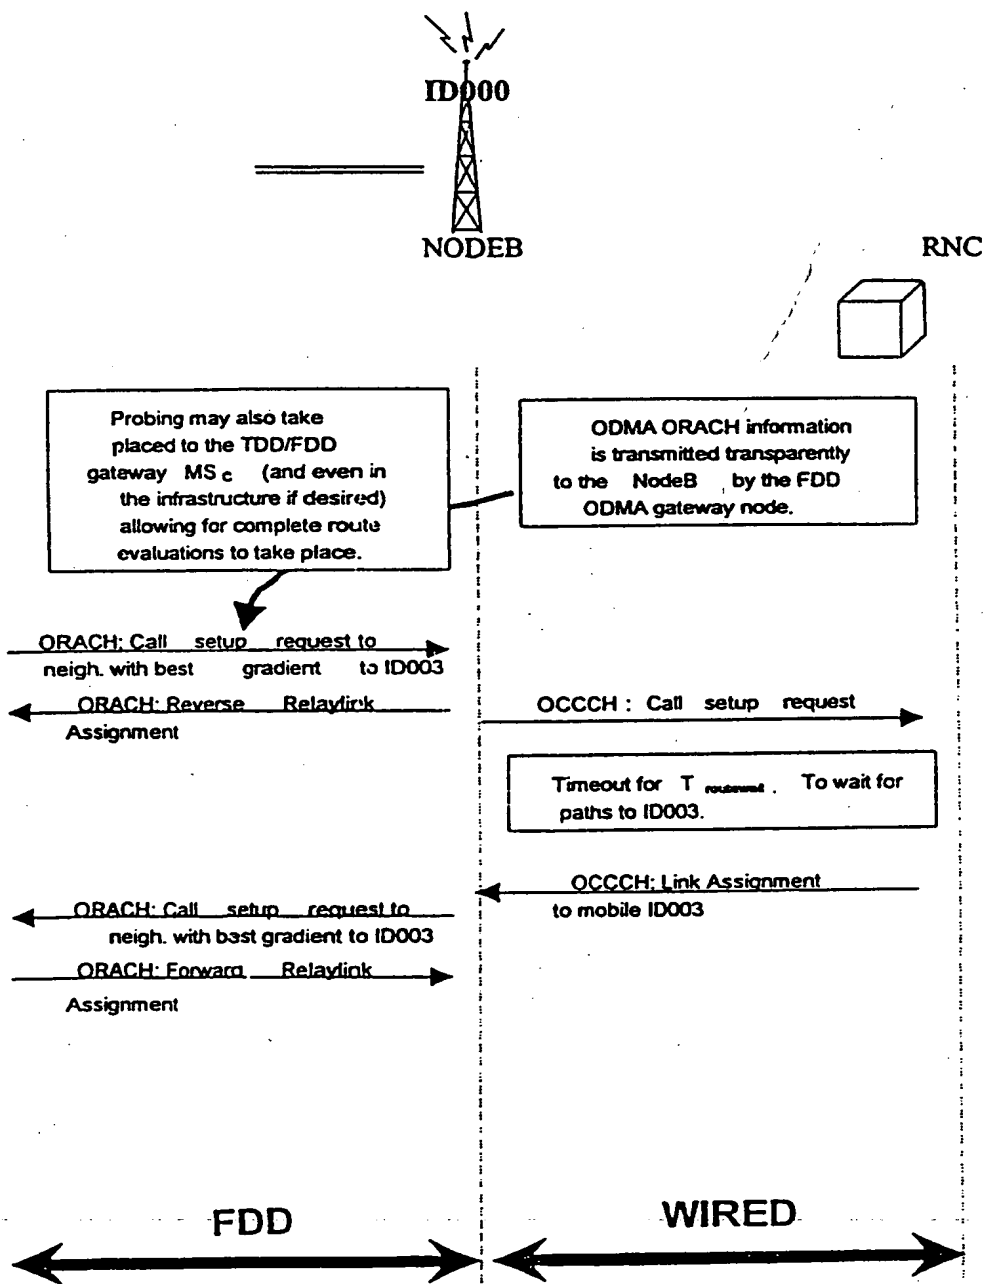


11/14

FIG 10

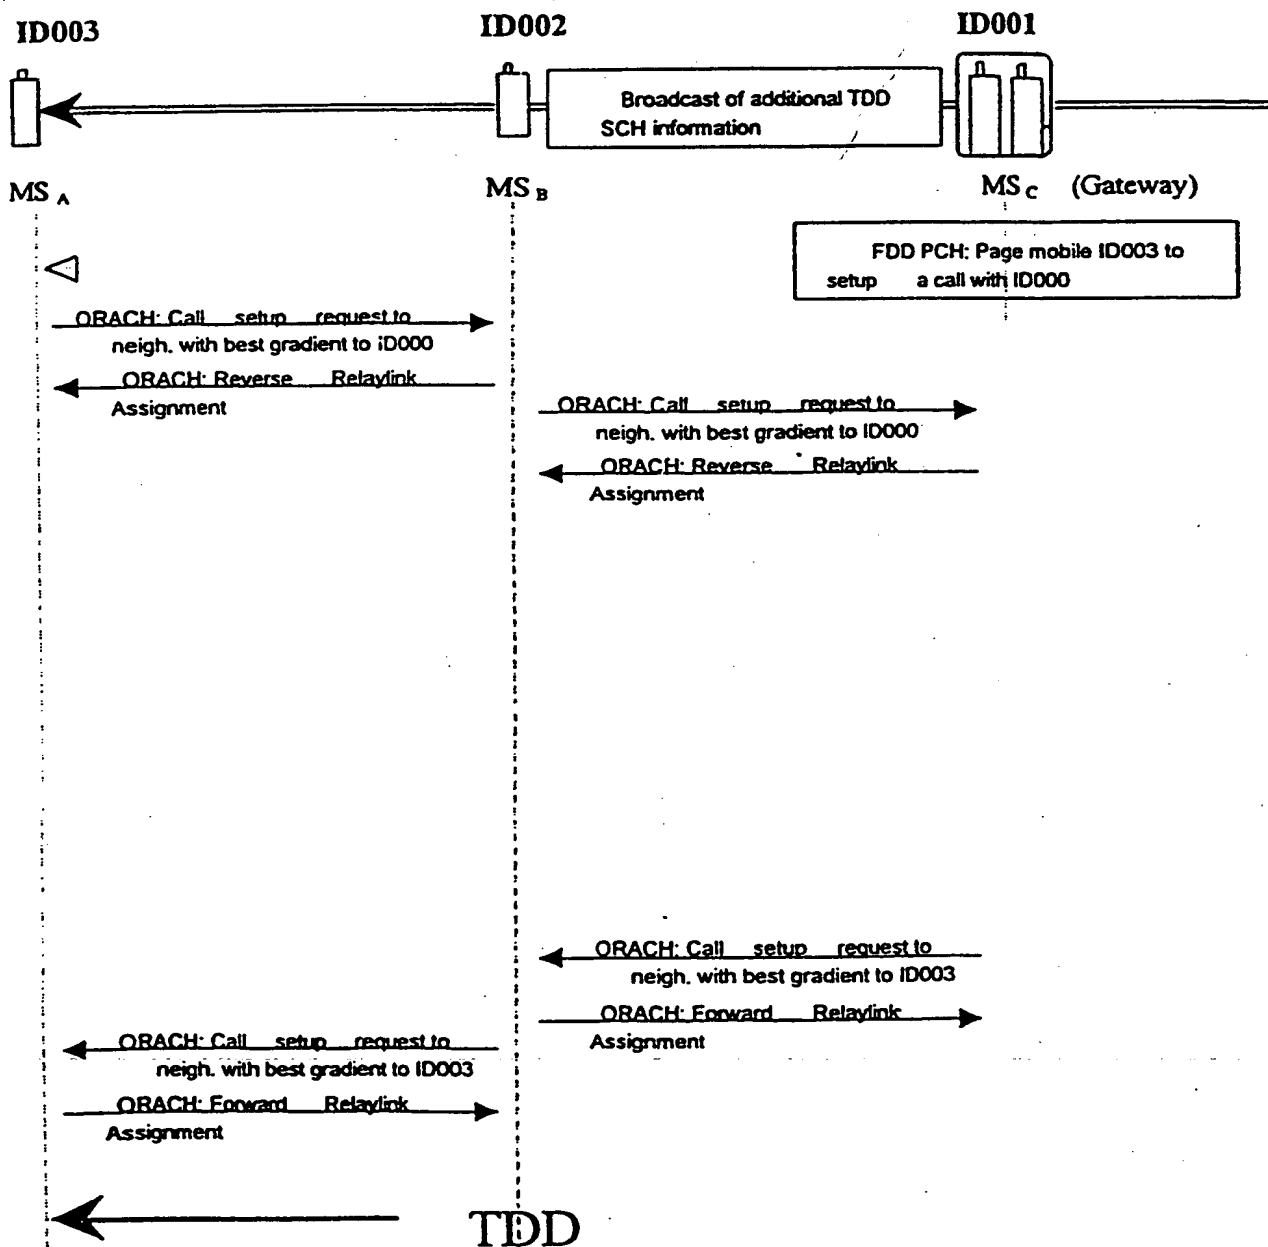

12/14


FIG 10 Continued

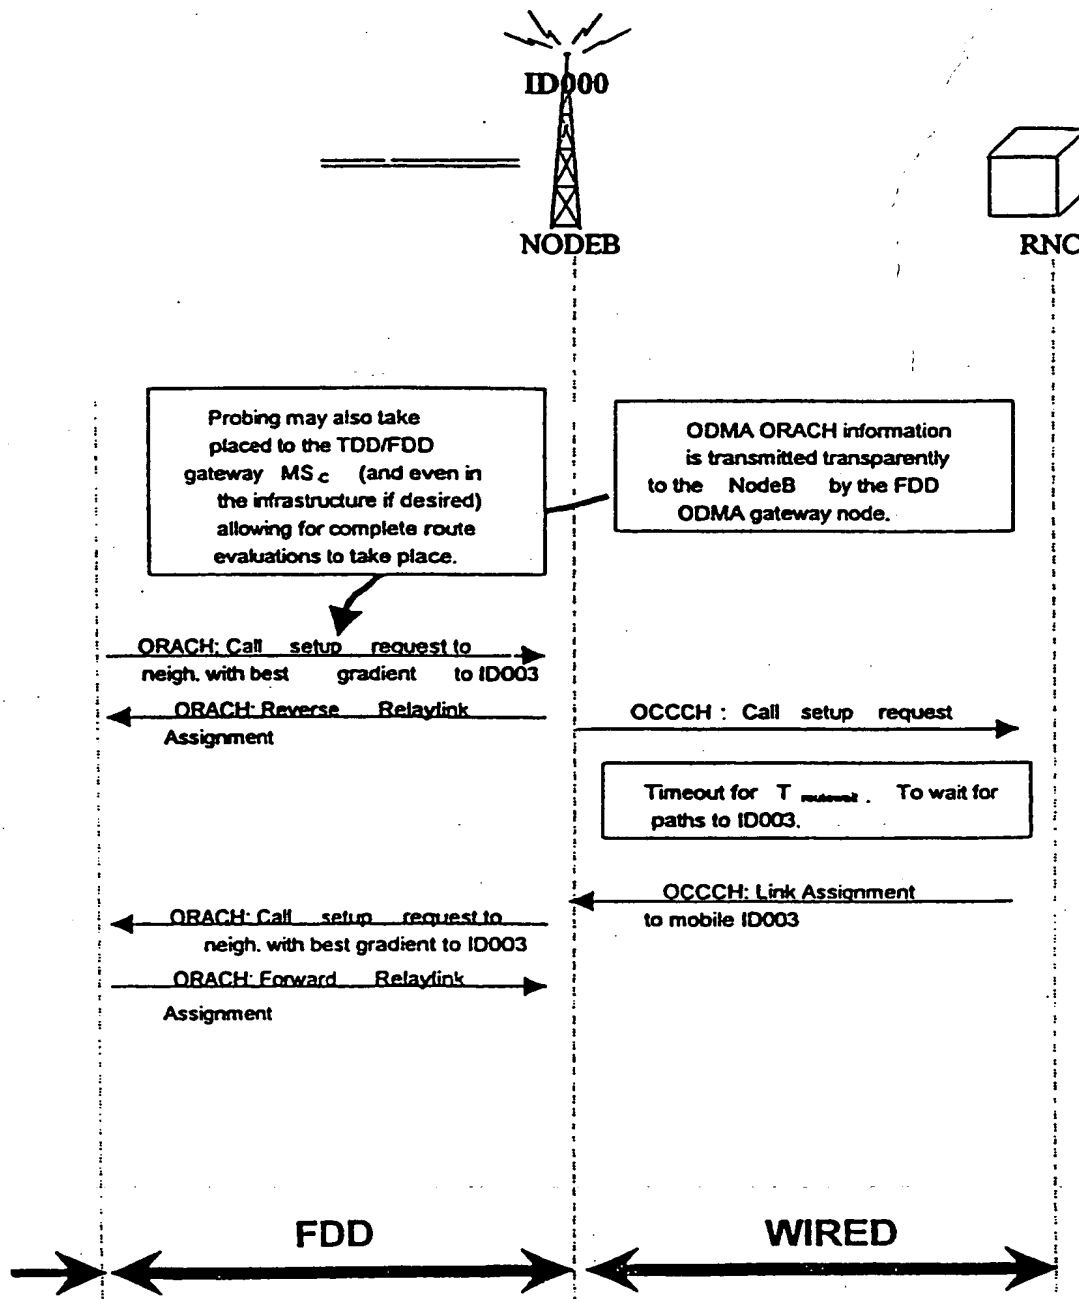

13.14

13/14

539 11

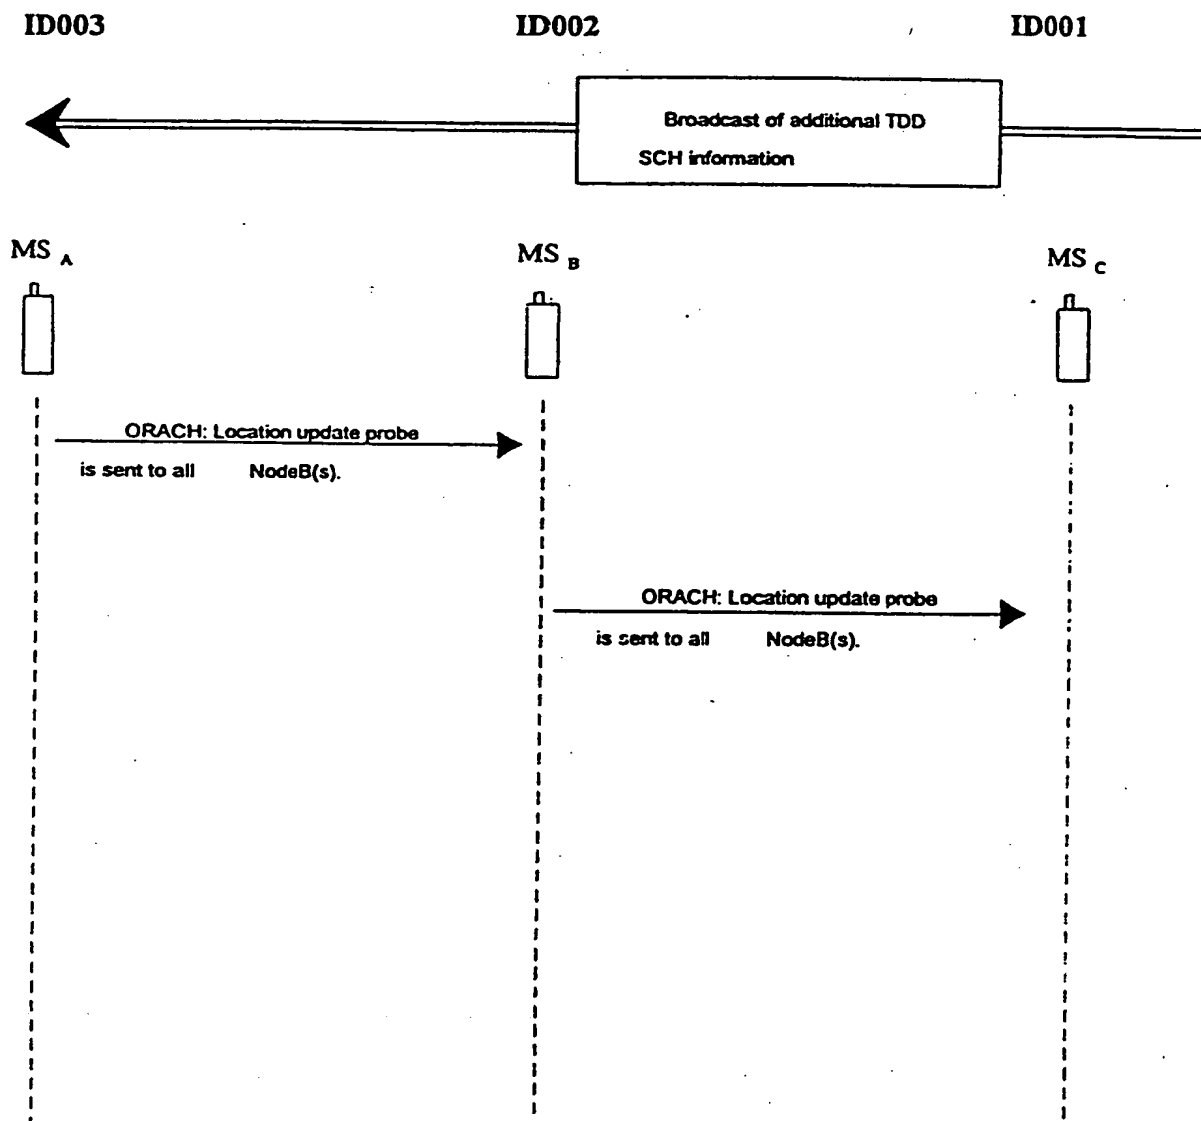

14
14

Fig 11 Continued

ID000

NodeB

RNC

Location information is provided to the network to increase the efficiency of algorithms searching for a given user.

ODMA ORACH information is transmitted transparently to the NodeB by the FDD ODMA gateway node.

ORACH: Location update probe
is sent to all NodeB(s).

OCCCH : Call setup request